


# Order form **Sunbreaker 210** moveable


For order number:	)
	J

## 1. Select the type of blade and plugs

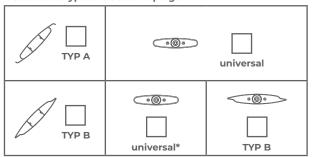


<sup>\*</sup>does not cover the entire surface of the blade

#### 2. Specify how the system is to be installed

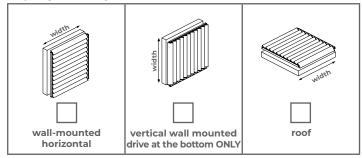


The SUNBREAKER 210 system can be installed in a niche or on a substructure. NO BRACKETS FOR FAÇADE MOUNTING!!!

#### 3. Select drive type

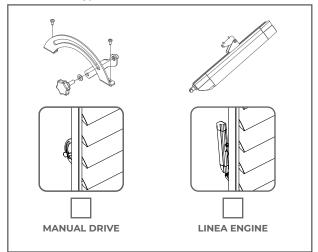


# 4. On which blade is to be mounted the lever for the drive, counting from the bottom

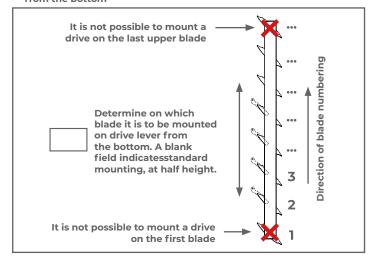

# 5. Choose your colours


3. Global year colours																													
	BEIGS			BEIGS			WH	ITES		DARK	GRE	Y			ANT	HRA	CITS				BLA	ACK		CZARNY		BRO	NZE		OTHER COLOUR RAL
COLOUR FROM SELT COLLECTION	VSR 240	RAL 1015	RAL 1013	RAL 9001	RAL 9010	RAL 9016	RAL 7035	RAL 9006	RAL 7001	RAL 7037	RAL 9007	RAL 7012	DB 703	FSM 71319	RAL 7015	RAL 7039	RAL 7024	RAL 7016	RAL 7021	RAL 7043	RAL 7022	RAL 9005	RAL 8014	RAL 8016	VSR 780	RAL 8003			
Kolor konstrukcji																													
Kolor tworzyw																													


### 6. Automation



6.2. Somfy RTS radio control							
	Remote control receiver flush mounted Universal Receiver RTS (FD)						
	Remote control receiver Universal Slim Reciver RTS Stak3/Stas3 (FD)						
40+1	Single-channel remote control Situo 1 PURE (FP)						
( × 9 × 16	Five-channel remote control Situo 5 PURE (FU)						

6.3. Somfy IO radio control									
	Remote control receiver Pergola remote control receiver Slim receiver io (N1)								
( + () + · 1	Pilot jednokanałowy Situo 1 io PURE II <mark>(3M)</mark>								
( < 0 × 16	Pilot pięciokanałowy Situo 5 io PURE II (3S)								

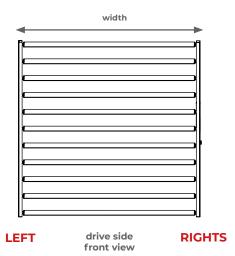

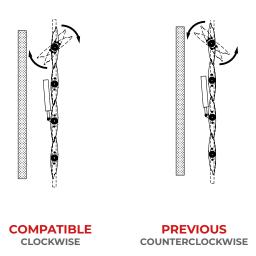

In the case of wall mounting, the above drawingis to be interpreted as the front view of the system (as seen from outside the building). In the case of roof assembly, the above drawing shows top view.

The figure shows a view of the closed system on the left. You can choose between feathers that open clockwise or counterclockwise determining the this way determining the opening side of the feathers.

9. Specify the dimensions, number and drive side and direction of opening of the blades.

QUANTITY [szt.]		WIDTH [mm]	HEIGHT [mm]	DRIVE SIDE LEFT/RIGHT	DIRECTIONS OF OPENING THE BLADES CLOCKWISE / COUNTECLOCKWISE	DRIVE MANUAL/MOTOR	DRIVE LEVER CONNECTION BLADE NUMBER
1							
2							
3							
4							
5							
6							
7							

Mounting of the SUNBREAKER 210 moving system can be carried out in a niche or on a substructure. NO BRACKETS FOR FAÇADE MOUNTING!!!

ord Ter Tec for mo	derstand the selers submitted, ms and Cond chnical-operation external systeptor drive and	statements received and to have read a litions, General Warran and documentation and comms, Declaration of Community information on safet operated with cord a	ney speak fluent English and submitted in English and accepted General Sales that Terms and Conditions of Declaration of performance conformity for systems with y elements installation for and ball chain, available at	
	COMPANY:	DATE:	SIGNATURE:	

Delivery address:

	Notes:			
/				